


WALL HEIGHT(H) ABOVE GRADE	FOOTING W	D	VERTICAL REINFORCEMENT
2' -0" - 3' -0"	12"	8"	1-#4 @ 4' -0" O. C.
3' -1" - 4' -0"	14"	8"	1-#4 @ 4' -0" O. C.
4' -1" - 5' -0"	16"	9"	1-#4 @ 2' -8" O. C.
5' -1" - 6' -0"	18"	9"	1-#4 @ 2' -8" O. C.

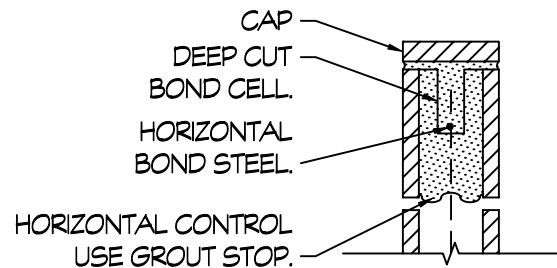

NOTES:


CONCRETE : 5-SACK, 7 1/2 GAL. WATER, 2000 PSI.

CONCRETE MODULE: 6" WIDE, ASTM C-90.

REINFORCEMENT: #4, ASTM A-15, PROVIDE 16" LAPS IN FOOTING AND NO LESS THAN 20" LAPS IN GROUTED CELLS.

MORTAR: 1-PART CEMENT/3-PARTS CLEAN SAND.

GROUT: 1-PART CEMENT/3-PART CLEAN SAND/MAY ADD 1/10 LIME TO FLUID CONSISTANCY.



TYPICAL GARDEN WALL

BUILDING DEPARTMENT

Scale: 1" = 1' - 0"

Date: 5/22/2002

Sheet: 1 of 1 Sheets

Drawn By: KSL
Checked By: BJ